

CM108AH

Highly Integrated USB Audio I/O Controller



DESCRIPTION

The CM108AH is a highly integrated single-chip USB audio solution. All essential analog modules are embedded in the CM108AH, including dual DAC and earphone driver, ADC, microphone booster, PLL, regulator and USB transceiver modules. It is perfectly suited to USB headset, USB earphone or USB audio-interface box applications. As well, many features are programmable with jumper pins or by external EEPROM.

Audio adjustments are easily controlled via specific HID-compliant volume control pins. An external codec or audio DSP can be connected to the CM108AH via I2S pin for further processing.

FEATURES

- Supports USB 2.0 full speed operation
- Compliant with USB audio device class specification 1.0
- Supports USB suspend/resume modes and remote wakeup with volume control pins
- Single 12MHz crystal input with on-chip PLL and embedded USB transceiver
- Jumper pin for speaker mode (playback only) or headset mode (playback plus recording)
- For headset mode, USB audio function topology has 2 input terminals, 2 output terminals, 1 mixer unit, 1 selector unit, and 3 feature units
- Jumper pin allows for mixer unit enable/disable when in headset mode

BLOCK DIAGRAM

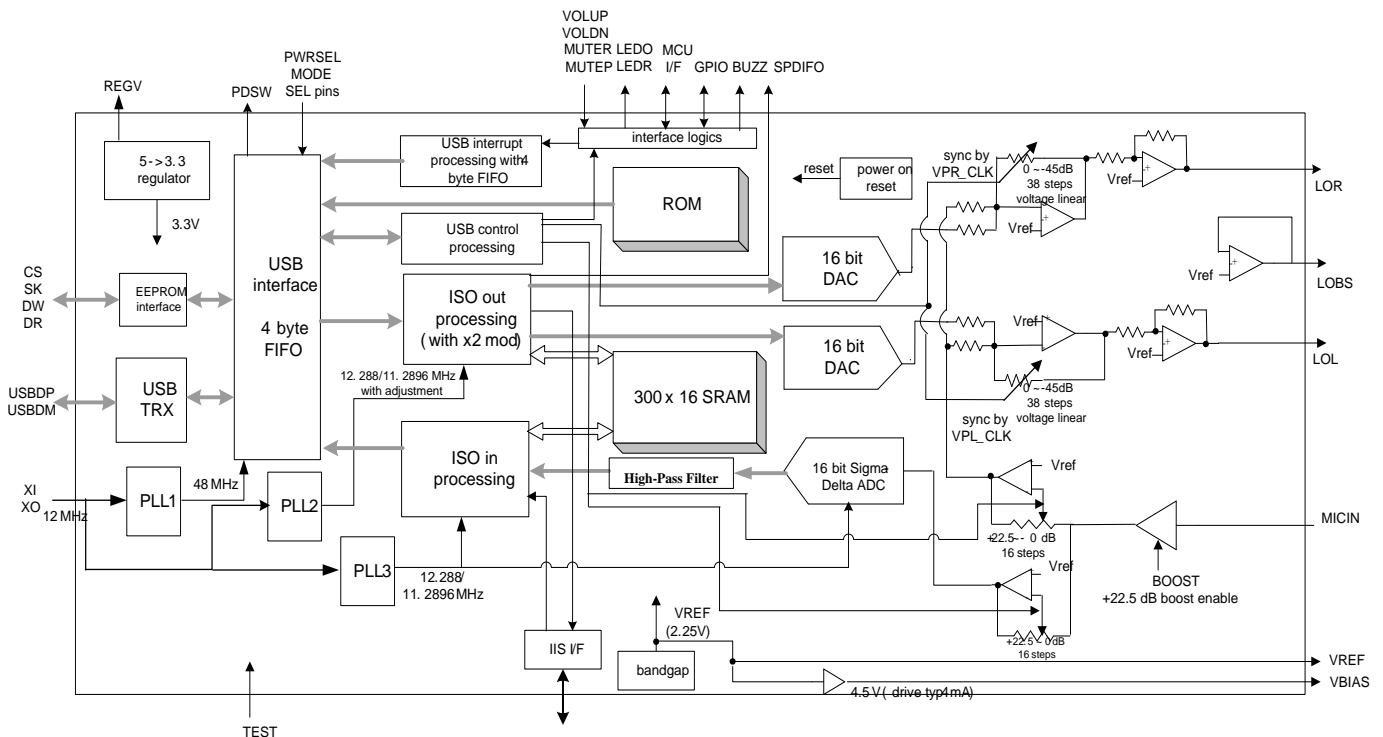


TABLE OF CONTENTS

| | | |
|-------|---|----|
| 1 | Description and Overview | 3 |
| 2 | Features | 3 |
| 3 | Pin Descriptions | 5 |
| 3.1 | Pin Assignment by Pin Number | 5 |
| 3.2 | Pin-Out Diagram | 5 |
| 3.3 | Pin Signal Descriptions | 6 |
| 4 | I ² S Interface | 8 |
| 5 | Block Diagram | 9 |
| 6 | Ordering Information | 10 |
| 7 | Function Description | 11 |
| 7.1 | USB Interface | 11 |
| 7.1.1 | Device Descriptor | 11 |
| 7.1.2 | Configuration Descriptor | 12 |
| 7.1.3 | Content Format for EEPROM (93C46) | 13 |
| 7.1.4 | USB Audio Topology Diagram | 14 |
| 7.2 | Jumper Pins and Mode Setting: | 15 |
| 7.3 | HID Feature | 16 |
| 7.3.1 | What's HID? | 16 |
| 7.3.2 | HID Descriptor | 17 |
| 7.3.3 | Windows Software Architecture for HID | 18 |
| 7.4 | Internal Registers | 19 |
| 8 | Electrical Characteristics | 22 |
| 8.1 | Absolute Maximum Rating | 22 |
| 8.2 | Operation Conditions | 22 |
| 8.3 | Electrical Parameters | 23 |
| 9 | Audio Quality Graphs | 24 |
| 9.1 | Line Out Frequency Response @ 48KHz Sample Rate (10K Ohm Loading) | 24 |
| 9.2 | Line Out THD+N @ 48KHz Sample Rate (10K Ohm Loading) | 24 |
| 9.3 | Microphone Input Freq Response @ 48KHz Sample Rate | 25 |
| 9.4 | Microphone Input THD+N @ 48KHz Sample Rate | 25 |
| | Reference | 26 |

1 Description and Overview

The CM108AH is a highly integrated single-chip USB audio solution. All essential analog modules are embedded in the CM108AH, including dual DAC and earphone driver, ADC, microphone booster, PLL, regulator and USB transceiver modules. It is perfectly suited to USB headset, USB earphone or USB audio-interface box applications. As well, many features are programmable with jumper pins or by external EEPROM.

Audio adjustments are easily controlled via specific HID-compliant volume control pins. An external codec or audio DSP can be connected to the CM108AH via I2S pin for further processing. Plus, 3 GPIO pins can be accessed with customer application software for additional value-adding applications.

2 Features

- Supports USB 2.0 full speed operation
- Compliant with USB audio device class specification 1.0
- Supports USB suspend/resume modes and remote wakeup with volume control pins
- Single 12MHz crystal input with on-chip PLL and embedded USB transceiver
- Jumper pin for speaker mode (playback only) or headset mode (playback plus recording)
- For headset mode, USB audio function topology has 2 input terminals, 2 output terminals, 1 mixer unit, 1 selector unit and 3 feature units
- Jumper pin allows for mixer unit enable/disable when in headset mode
- For speaker mode, the USB audio topology has 1 input terminal, 1 output terminal and 1 feature unit
- Supports one control endpoint, one isochroous OUT endpoint, one isochroous IN endpoint, and one interrupt IN endpoint
- Alternate zero bandwidth setting for releasing playback bandwidth on USB Bus when device is inactive
- Supports AES/EBU, IEC60958, S/PDIF consumer formats for stereo PCM data at S/PDIF output
- Volume up, volume down, and playback mute pins support USB HID for host control synchronization
- Record mute pin with LED indicator for record mute status
- External EEPROM interface for vendor-specific USB VID, PID and serial number
- EEPROM write function via vendor-specific request for mass production convenience
- Customized embedded VID, PID, product and manufacturer strings and volume settings are available
- 3 GPIO pins with read/write via HID interface
- Jumper pin to set the power mode (100mA or 500mA, Bus-powered or self-powered)
- Isochronous transfer uses adaptive mode with internal PLL for synchronization
- 48K/44.1KHz sampling rate for both playback and recording
- Soft mute function
- Embedded high-performance 16-bit audio DAC with earphone phone amplifier

CM108AH

Highly Integrated USB Audio I/O Controller




- Host-side data loss noise-reduction function
- Embedded 16-bit ADC input with microphone boost
- Embedded power-on reset block
- Embedded 5V to 3.3V regulator for single external 5V operation
- Compatible with Win XP/Vista/7/8, Linux and Mac OS X without additional drivers (WinCE/Win Mobile are supported by C-Media's proprietary driver)
- 48-pin LQFP package

3 Pin Descriptions

3.1 Pin Assignment by Pin Number

| Pin # | Signal Name | Pin # | Signal Name | Pin # | Signal Name | Pin # | Signal Name |
|-------|-------------|-------|-------------|-------|-------------|-------|-------------|
| 1 | SPDIFO | 13 | GPIO3 | 25 | VBIAS | 37 | REGV |
| 2 | DI | 14 | DVSS1 | 26 | VREF | 38 | MSEL |
| 3 | DO | 15 | GPIO4 | 27 | MICIN | 39 | VOLUP |
| 4 | SK | 16 | SDIN | 28 | N.C. | 40 | PDSW |
| 5 | CS | 17 | ADSCLS | 29 | AVDD1 | 41 | USBDM |
| 6 | MUTER | 18 | MUTEP | 30 | LOL | 42 | USBDM |
| 7 | PWRSEL | 19 | ADLRCK | 31 | LOBS | 43 | GPIO1 |
| 8 | XI | 20 | ADMCLK | 32 | LOR | 44 | SDOUT |
| 9 | XO | 21 | LEDR | 33 | AVSS2 | 45 | DAMCLK |
| 10 | MODE | 22 | ADSEL | 34 | AVDD2 | 46 | DALRCK |
| 11 | N.C. | 23 | TEST | 35 | DVDD | 47 | DASCLK |
| 12 | LEDO | 24 | AVSS1 | 36 | DVSS2 | 48 | VOLDN |

3.2 Pin-Out Diagram

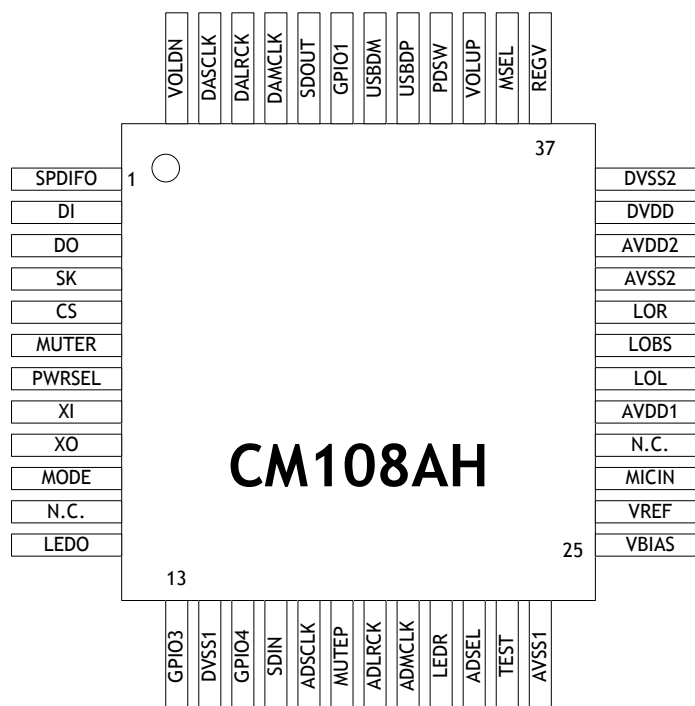

Pin Assignments (top view)

3.3 Pin Signal Descriptions

| Pin # | Symbol | Type | Description |
|-------|---------|-------------------|---|
| 1 | SPDIFO | DO, 8mA, SR | SPDIF output |
| 2 | DI | DIO, 8mA, PD, 5VT | EEPROM interface data read from EEPROM |
| 3 | DO | DO, 4mA, SR | EEPROM interface data write to EEPROM |
| 4 | SK | DO, 4mA, SR | EEPROM interface clock |
| 5 | CS | DO, 4mA, SR | EEPROM interface chip select |
| 6 | MUTER | DI, ST, PU | Mute recording (edge trigger with de-bouncing) |
| 7 | PWRSEL | DI, ST | Chip power select pin, worked by MODE Pin Speaker mode - H: 100mA self-powered L: 500mA Bus-powered Headset mode - H: 100mA Bus-powered, L: 500mA Bus-powered (H: push up to 3.3V, L: push down to ground) |
| 8 | XI | DI | Input pin for 12MHz oscillator |
| 9 | XO | DO | Output pin for 12MHz oscillator |
| 10 | MODE | DI, ST | Operating mode selection H: speaker mode - playback only L: headset mode - playback & recording (H: push up to 3.3V, L: pull down to ground) |
| 11 | N.C. | | |
| 12 | LEDO | DO, SR, 8mA | LED operation light: output H for power on, toggling for data transmit |
| 13 | GPIO3 | DIO, 8mA, PD, 5VT | GPIO pin |
| 14 | DVSS1 | P | Digital ground |
| 15 | GPIO4 | DIO, 8mA, PD, 5VT | GPIO pin |
| 16 | SDIN | DIO, 8mA, PD, 5VT | ADC I2S data input |
| 17 | ADSCCLK | DIO, 4mA, SR | ADC I2S serial clock |
| 18 | MUTEP | DI, ST, PU | Mute playback (edge trigger with de-bouncing) |
| 19 | ADLRCK | DO, 4mA, SR | ADC I2S left/right clock |
| 20 | ADMCLK | DIO, 4mA, SR | 11.2896MHz output for 44.1KHz sampled data and 12.288MHz output for 48KHz sampled data |
| 21 | LEDR | DO, SR, 8mA | LED for mute recording indicator, output H when recording is muted |
| 22 | ADSEL | DI, ST, PD | ADC input source select pin H: use external (via I2S) ADC L: use internal ADC (H: push up to 3.3V, L: push down to ground) |
| 23 | TEST | DI, ST, PD | Test mode select pin, H: test mode L: normal operation (H: push up to 3.3V, L: push down to ground) |
| 24 | AVSS1 | P | Analog ground |
| 25 | VBIAS | AO | Microphone bias voltage supply (4.5V), with small driving capability |
| 26 | VREF | AO | Connecting to external decoupling capacitor for embedded bandgap circuit, 2.25V output |
| 27 | MICIN | AI | Microphone input |
| 28 | N.C. | | |
| 29 | AVDD1 | P | 5V analog power for analog circuit |
| 30 | LOL | AO | Line out: left channel |
| 31 | LOBS | AO | DC 2.25V output for line out bias |
| 32 | LOR | AO | Line out: right channel |
| 33 | AVSS2 | P | Analog ground |

CM108AH

Highly Integrated USB Audio I/O Controller




| | | | |
|----|--------|----------------------|--|
| 34 | AVDD2 | P | 5V power supply for analog circuit |
| 35 | DVDD | P | 5V power supply for internal regulator |
| 36 | DVSS2 | P | Digital ground |
| 37 | REGV | AO | 3.3V reference output for internal 5V to 3.3V regulator |
| 38 | MSEL | DI, ST | Mixer enable select, worked by MODE pin, H: with mixer/AA-path enabled (with default mute) L: without mixer/AA-path disabled (H: push up to 3.3V, L: push down to ground) USB descriptors will also be changed accordingly |
| 39 | VOLUP | DI, ST, PU | Volume up (edge trigger with de-bouncing) |
| 40 | PDSW | DO, 4mA, OD | Power down switch control signal (for PMOS polarity) 0: normal operation 1: power down mode (suspend mode) |
| 41 | USBDP | AIO | USB Data D+ |
| 42 | USBDM | AIO | USB Data D- |
| 43 | GPIO1 | DIO, 8mA, PD, 5VT | GPIO pin |
| 44 | SDOUT | DO, 4mA, SR | DAC I2S data output |
| 45 | DAMCLK | DO, 4mA, SR | 11.2896 MHz output for 44.1KHz sampled data and 12.288 MHz output for 48KHz sampled data |
| 46 | DALRCK | DO, 4mA, SR | DAC I2S left/right clock |
| 47 | DASCLK | DO, 4mA, SR | DAC I2S serial clock |
| 48 | VOLDN | DI, ST, PU | Volume down (edge trigger with de-bouncing) |

Note: DI / DO / DIO - Digital Input / Output / Bi-Directional Pad
AI / AO / AIO - Analog Input / Output / Bi-Directional Pad
SR - Slew Rate Control
ST - Schmitt Trigger
PD / PU - Pull Down / Pull Up
5VT - 5 Volt Tolerant (3.3V Pad)
OD - Open Drain

4 I²S Interface

The CM108AH provides an I²S interface for both playback and recording. External ADC, DAC, or DSP can be added to provide additional functions within the USB audio system. The CM108AH sends out master clock (fixed at x256), LRCK (fixed at x64), and data clock data. Therefore, external ADCs, DACs, or DSPs should be set to slave mode.

The left channel of the CM108AH's I²S bus is used for mono recording. Both I²S buses use a 5V tolerant pad in order to easily interface with 5V or 3.3V devices. Playback data is simultaneously sent to both the DAC and I²S bus. The recording source (ADC or I²S bus) can be selected by ADSEL jumper pin.

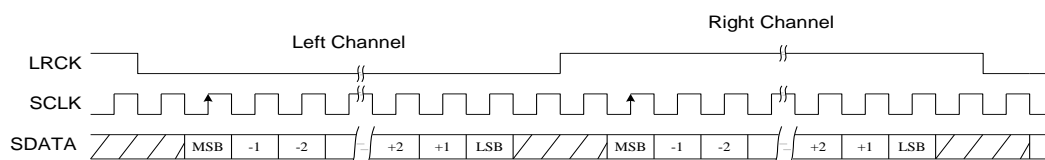


CM108AH

Highly Integrated USB Audio I/O Controller



5 Block Diagram

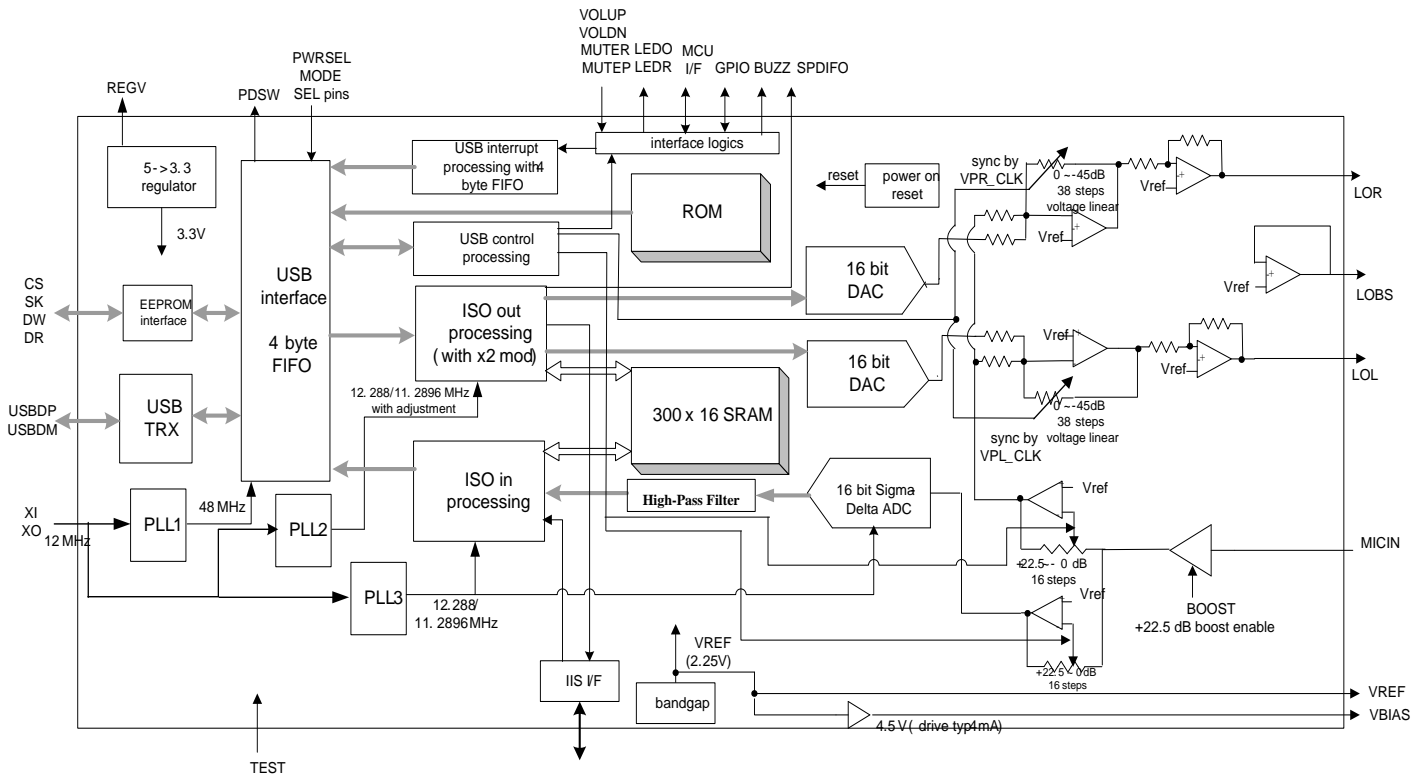

CM108AH Block Diagram

CM108AH

Highly Integrated USB Audio I/O Controller




6 Ordering Information

| Model No. | Package | Operating Ambient Temperature | Supply Range |
|-----------|--|-------------------------------|----------------------|
| CM108AH | 48-pin LQFP, 7mm × 7mm × 1.4mm (plastic) | -15°C to +70°C | DVdd = 5V, AVdd = 5V |

Note: Outline Dimensions are shown in inches and millimeters

48-Lead Thin Plastic Quad Flatpack (LQFP)

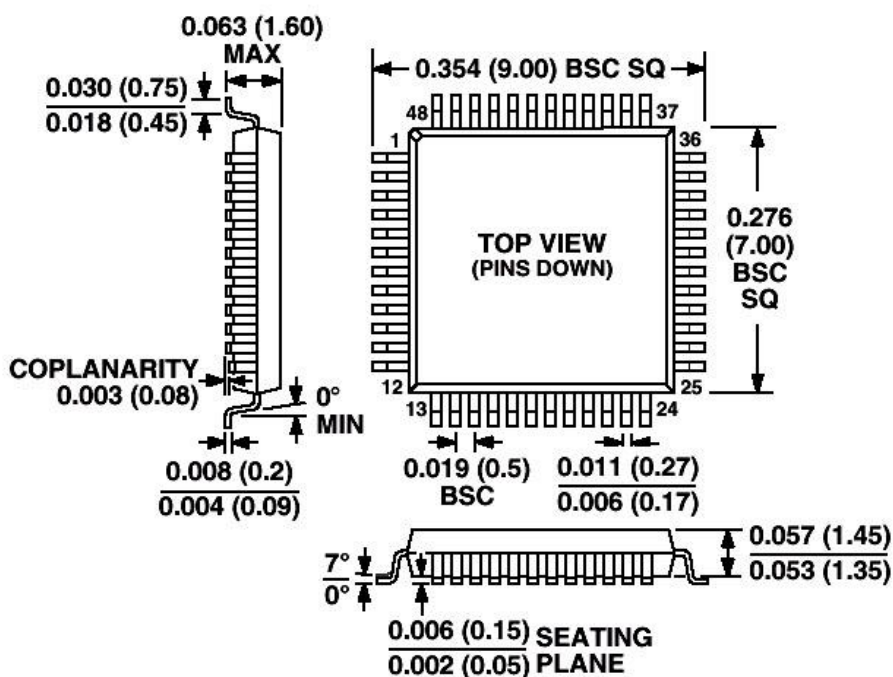

CM108AH Ordering Information

7 Function Description

7.1 USB Interface

The CM108AH integrates USB transceiver, PLL and regulator modules, meaning only a few passive components are necessary for USB interface connection. Default USB descriptors are embedded in the CM108AH, so no additional design effort is needed for generic USB operation. For custom orders, customers can attach a 93C46 EEPROM to override the embedded VID, PID, product and manufacturer strings, and serial number for each set. The CM108AH automatically detects the 93C46, and the overwrite function is performed at start up.

7.1.1 Device Descriptors

| Offset | Field | Size | Value (Hex) | Description |
|--------|--------------------|------|-------------|--|
| 0 | bLength | 1 | 12 | Total: 18 bytes |
| 1 | bDescriptorType | 1 | 01 | Device descriptor |
| 2 | bcdUSB | 2 | 0110 | USB 1.1-compliant |
| 4 | bDeviceClass | 1 | 00 | |
| 5 | bDeviceSubClass | 1 | 00 | |
| 6 | bDeviceProtocol | 1 | 00 | |
| 7 | bMaxPacketSize0 | 1 | 40 | Endpoint zero size = 64 bytes |
| 8 | idVendor | 2 | 0d8c | Vendor ID |
| 10 | idProduct | 2 | 0139 | Product ID programmable by MSEL and MODE pin |
| 12 | bcdDevice | 2 | 0100 | Device compliant with Audio Device class specification version 1.0 |
| 14 | iManufacturer | 1 | 01 | String descriptor index describes manufacturer |
| 15 | iProduct | 1 | 02 | String descriptor index describes product |
| 16 | iSerialNumber | 1 | 03 | String descriptor index displays device serial no. |
| 17 | bNumConfigurations | 1 | 01 | Configuration number = 1 |


7.1.2 Configuration Descriptors

| Offset | Field | Size | Value (Hex) | Description |
|--------|---------------------|------|-------------|---|
| 0 | bLength | 1 | 09 | Total: 9 bytes |
| 1 | bDescriptorType | 1 | 02 | Configuration descriptor |
| 2 | wTotalLength | 2 | | Total length of data returned for this configuration, programmable by MSEL and MODE pin |
| 4 | bNumInterfaces | 1 | 04 or 03 | Number of interfaces supported by this configuration, changed by MODE pin: EP0: control interface EP1: ISO-OUT interface EP2: ISO-IN interface (optional) EP3: INT-IN (HID) interface |
| 5 | bConfigurationValue | 1 | 01 | |
| 6 | iConfiguration | 1 | 00 | |
| 7 | bmAttributes | 1 | A0 or E0 | Programmable by PWRSEL |
| 8 | bMaxPower | 2 | 32 or FA | Maximum power consumption of the USB, programmable by MODE and PWRSEL pins |

7.1.3 Content Format for EEPROM (93C46)

| Addr (Dec) | Addr (Hex) | Description |
|----------------|-------------------|---|
| 0 | 0x00 | Magic Word 0x670X where X = bit 4, 3, 2, 1 bit 3, value within address 0x2A,0x2B is valid 1: valid 0: invalid bit 2, manufacture string enable 1: enable(default) 0: disable bit 1, serial number enable control 1: enable 0: disable(default) bit 0, product string enable control 1: enable(default) 0: disable |
| 1 | 0x01 | VID 2-byte |
| 2 | 0x02 | PID 2-byte |
| 3 | 0x03 | Serial number length (low byte) Serial number first byte (high byte) |
| 4 ~ 9 | 0x04 ~ 0x09 | Serial number: 12 bytes |
| 10 | 0x0A | Product string length (low byte) Product string first byte (high byte) |
| 11 ~ 25 | 0x0B ~ 0x19 | Product string: 30 bytes (default: USB PnP sound device) |
| 26 | 0x1A | Manufacturer string length (low byte) Manufacturer string first byte ^t (high byte) |
| 27 ~ 41 | 0x1B ~ 0x29 | Manufacturer string: 30 bytes (default: C-Media Electronics Inc.) |
| 42 | 0x2A | bit 15 ~ 8 DAC initial volume (7-bit) max: 0x02 min: 0x4a bit 7 ~ 0 ADC initial volume (5-bit) max: 0x00 min: 0x78 |
| 43 | 0x2B | bit 15 ~ bit 9 <reserved> bit 8 Shutdown DAC analog - 1: shutdown, 0: active (default) bit 7 Total power control - 1: enable, 0: disable (default) bit 6 Reserved, should be 0 bit 5 MIC high pass filter - 1: enable (default), 0: disable bit 4 ADC synchronization mode - 1: enable, 0: disable (default) bit 3 MIC BOOST - 1: enable (default), 0: disable bit 2 DAC output terminal property set to SPK or HP 1: Headset, 0: Speaker (default) bit 1 HID - 1: enable (default), 0: disable bit 0 Remote wakeup enable/disable 1: enable, 0: disable (default) |
| 44 ~ END | 0x2C ~ END | <reserved> |

7.1.4 USB Audio Topology Diagram

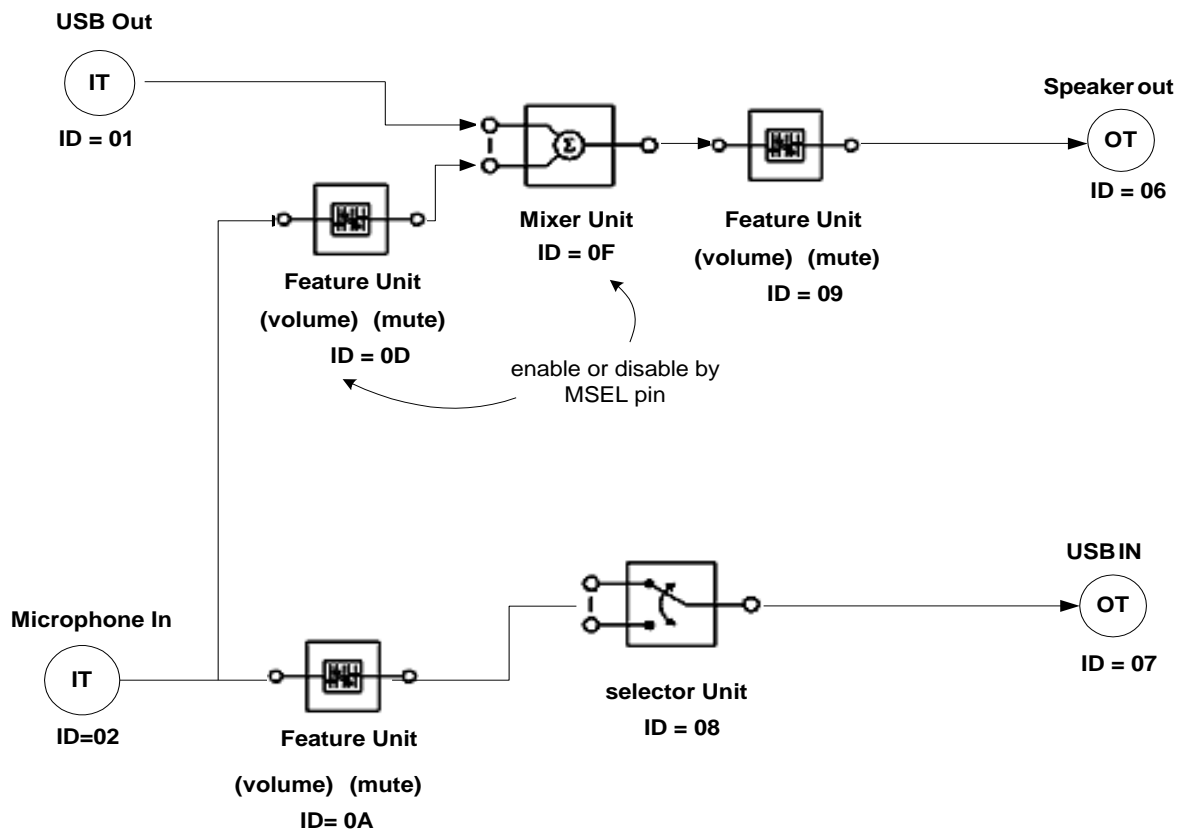

7.2 Jumper Pins and Mode Setting:

The CM108AH can be configured via several jumper pins. These jumper pin settings affect both USB descriptors and USB audio topology.

7.2.1 MODE Pin and MSEL Pin

If the MODE pin is pushed up to 3.3V (speaker mode), a playback-only function is activated and no recording function is declared to the host. At this setting, the MSEL pin is ignored and only one input terminal, one output terminal and one feature unit is declared in the USB audio topology.

If the MODE pin is pulled low (headset mode), a full-duplex playback and recording function is reported to the host. The MSEL pin setting activates one mixer unit and one feature unit.

- When MSEL = 1, the mixer is enabled (AA-path enabled), but with default mute setting
- When MSEL = 0, the mixer is disabled (AA-path disabled)

The above USB audio topology (7.1.4) is an example of headset mode with enabled mixer.

7.2.2 MODE Pin and PWRSEL Pin

The PWRSEL pin affects the power configuration of the CM108AH. Together with the MODE pin, there are a total of 4 programmable combinations.

| Combinations | | MODE | |
|--------------|------|--|--|
| | | 3.3V | GND |
| PWRSEL | 3.3V | Speaker mode: Playback only (100mA self-powered) | Headset mode: Playback and recording (100mA Bus-powered) |
| | GND | Speaker mode: Playback only (500mA Bus-powered) | Headset mode: Playback and recording (500mA Bus-powered) |

USB Audio Topology Diagram

7.3 HID Feature

The CM108AH's HID feature allows users to set volume up, volume down, playback mute and recording mute button pins, and reports the changes to the host to synchronize host side settings. In addition, all CM108AH internal registers can be accessed via HID function call.

7.3.1 What's HID?

USB protocols can configure devices at startup or when they are plugged in at run time. These devices are categorized into various device classes. Each device class defines the common behavior and protocols for devices that serve similar functions. The HID (Human Interface Device) class is one of the device classes.

The HID class consists primarily of devices that are used to control the operation of computer systems.

Typical examples of HID class devices include:

- Keyboards and pointing devices: mice, trackballs and joysticks
- Front-panel controls: knobs, switches, buttons and sliders
- Controls that might be found on VCR remote controls, games or simulation devices: data gloves, throttles, and steering wheels
- Devices that may not require human interaction but provide data in a similar format to HID class devices: bar-code readers, thermometers or voltmeters

7.3.2 HID Descriptors

HID Interface Descriptor

| Offset | Field | Size | Value (Hex) | Description |
|--------|--------------------|------|-------------|---|
| 0 | bLength | 1 | 09 | Size of this descriptor: 9 bytes |
| 1 | bDescriptorType | 1 | 04 | Interface descriptor type |
| 2 | bInterfaceNumber | 1 | 03 | Interface number: 3 |
| 3 | bAlternateSetting | 1 | 00 | Alternate: 0 |
| 4 | bNumEndpoints | 1 | 01 | Number of endpoints used by this interface: 1 |
| 5 | bInterfaceClass | 1 | 03 | Interface class: HID |
| 6 | bInterfaceSubClass | 1 | 00 | Subclass: no |
| 7 | bInterfaceProtocol | 1 | 00 | Must be set to 0 |
| 8 | iInterface | 1 | 00 | String descriptor index that describes this interface |


HID Descriptor

| Offset | Field | Size | Value (Hex) | Description |
|--------|-------------------|------|-------------|---|
| 0 | bLength | 1 | 09 | Total: 9 bytes |
| 1 | bDescriptorType | 1 | 21 | HID descriptor type |
| 2 | bcdHID | 2 | 0100 | HID class version 1.0 |
| 4 | bCountryCode | 1 | 00 | |
| 5 | bNumDescriptors | 1 | 01 | |
| 6 | bDescriptorType | 1 | 22 | Report descriptor |
| 7 | wDescriptorLength | 2 | 0030 | Total size of the optional descriptor: 48 bytes |

Interrupt IN Endpoint Descriptor

| Offset | Field | Size | Value (Hex) | Description |
|--------|------------------|------|-------------|------------------------------|
| 0 | bLength | 1 | 07 | Total: 7 bytes |
| 1 | bDescriptorType | 1 | 05 | Endpoint descriptor type |
| 2 | bEndpointAddress | 1 | 83 | In Endpoint Number = 3 |
| 3 | bmAttributes | 1 | 03 | Interrupt endpoint type |
| 4 | wMaxPacketSize | 2 | 0004 | Maximum packet size: 4 bytes |
| 6 | bInterval | 1 | 2 | 2ms |

7.3.3 Windows Software Architecture for HID

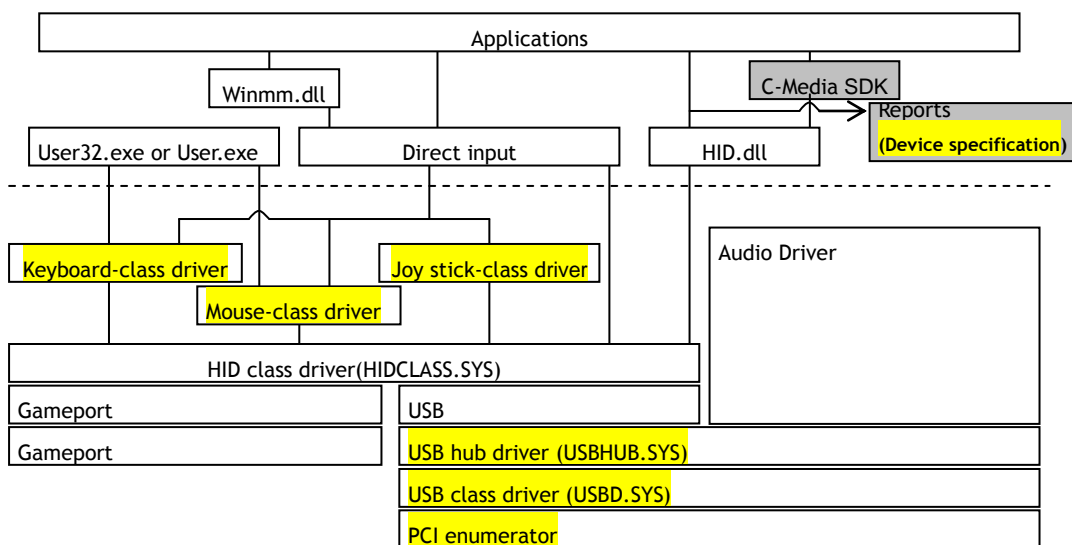

Note: Please contact our sales for a C-Media SDK sample if needed

7.4 Internal Registers

All of CM108AH's internal registers can be accessed via generic HID functional calls without the need to develop a kernel mode driver. In total, 4 bytes of data can be read or written from the HID. The input report is for read and the output report is for write. These internal registers are used to control GPIO pin, S/PDIF output and EEPROM data access.

HID_IR0 (HID input report byte 0)

Offset: 0x00

| Bits | Read/Write | Description | Default |
|------|------------|--|---------|
| 7-6 | R | 00: HID_IR1 is used as GPI, 10: values written to HID_IR0-3 are also mapped to EPROM_DATA0-1 and EEPROM_CTRL Others: reserved | 0x0 |
| 5-4 | R | Reserved | 0x0 |
| 3 | R | 0: no activity on record/mute button 1: record/mute button pressed then released | 0x0 |
| 2 | R | 0: no activity on playback/mute button 1: playback/mute button pressed then released | 0x0 |
| 1 | R | 0: volume-down button released 1: volume-down button pressed | 0x0 |
| 0 | R | 0: volume-up button released 1: volume-up button pressed | 0x0 |

HID_IR1 (HID input report byte 1)

Offset: 0x01

| Bits | Read/Write | Description | Default |
|------|------------|--|---------|
| 7-0 | R | When HID_IR0[7:6] == 2'b00: HID_IR1[3:0] is the input from GPIO4 ~ GPIO1 in input mode When HID_OR0[7] == 1'b1: mapped from EEPROM_DATA0 | 0x00 |

HID_IR2 (HID input report byte 2)

Offset: 0x02

| Bits | Read/Write | Description | Default |
|------|------------|---|---------|
| 7-0 | R | When HID_OR0[7] == 1'b1: mapped from EEPROM_DATA1 | 0x00 |

HID_IR3 (HID input report byte 3)

Offset: 0x03

| Bits | Read/Write | Description | Default |
|------|------------|--|---------|
| 7-0 | R | When HID_OR0[7] == 1'b1: mapped from EEPROM_CTRL | 0x00 |

HID_OR0 (HID output report byte 0)

Offset: 0x04

| Bits | Read/Write | Description | Default |
|------|------------|--|---------|
| 7-6 | R / W | 0: HID_OR1-2 are used for GPO; HID_OR0, 3 are used for SPDIF 1: reserved 2: values written to HID_OR0-3 are also mapped to EEPROM_DATA0-1, EEPROM_CTRL (See Note) 3: reserved | 0x0 |
| 5 | R / W | Reserved | 0x0 |
| 4 | R / W | When HID_OR0[7] == 1'b0: valid bit in SPDIF frame When HID_OR0[7] == 1'b1: reserved | 0x0 |
| 3-0 | R / W | When HID_OR0[7] == 1'b0: first nibble of SPDIF status channel When HID_OR0[7] == 1'b1: reserved | 0x0 |

Note 1: When EEPROM access is done, HID interrupt will occur. USB host can get the result from interrupt pipe (endpoint 3).

Note 2: HID_OR0 is used for SPDIF when SPDIF_CONFIG[5] == 1'b0

HID_OR1 (HID output report byte 1)

Offset: 0x05

| Bits | Read/Write | Description | Default |
|------|------------|--|---------|
| 7-0 | R / W | When HID_OR0[7:6] == 2'b00: HID_OR1[3:0] is the output to GPIO4 - GPIO1 in output mode 0: GPO drives L 1: GPO drives H When HID_OR0[7:6] == 2'b01: reserved When HID_OR0[7:6] == 2'b1x: mapped to EEPROM_DATA0 | 0x00 |

HID_OR2 (HID output report byte 2)

Offset: 0x06

| Bits | Read/Write | Description | Default |
|------|------------|---|---------|
| 7-0 | R / W | When HID_OR0[7:6] == 2'b00: HID_OR2[3:0] is the mode setting for GPIO4 ~ GPIO1 0: set GPIO to input mode 1: set GPIO to output mode When HID_OR0[7:6] == 2'b01: reserved When HID_OR0[7:6] == 2'b1x: mapped to EEPROM_DATA1 | 0x00 |

HID_OR3 (HID output report byte 3)

Offset: 0x07

| Bits | Read/Write | Description | Default |
|------|------------|--|---------|
| 7-0 | R / W | When HID_OR0[7] == 1'b0: category byte of SPDIF status channel When HID_OR0[7] == 1'b1: mapped to EEPROM_CTRL | 0x00 |

Note: HID_OR3 is used for SPDIF when SPDIF_CONFIG[5] == 1'b0

8 Electrical Characteristics

8.1 Absolute Maximum Rating

| Symbol | Parameters | Value | Unit |
|-----------|--|--------------|------|
| Dvmin | Min. digital supply voltage | - 0.3 | V |
| Dvmax | Max. digital supply voltage | + 6 | V |
| Avmin | Min. analog supply voltage | - 0.3 | V |
| Avmax | Max. analog supply voltage | + 6 | V |
| Dvinout | Voltage on any digital input or output pin | -0.3 to +5.5 | V |
| Avinout | Voltage on any analog input or output pin | -0.3 to +5.5 | V |
| TBstgB | Storage temperature range | -40 to +125 | POPC |
| ESD (HBM) | ESD human body mode | 4000 | V |
| ESD (MM) | ESD machine mode | 200 | V |
| Latch Up | JEDEC standard no.78, Mar. 1997 | 200 | mA |

8.2 Operation Conditions

| Operation conditions | | | | |
|--------------------------------|-----|-----|-----|------|
| | Min | Typ | Max | Unit |
| Analog supply voltage | 4.5 | 5.0 | 5.5 | V |
| Digital supply voltage | 4.5 | 5.0 | 5.5 | V |
| Total power consumption | - | 35 | | mA |
| Suspend-mode power consumption | - | 500 | | uA |
| Operating ambient temp. | -15 | - | 70 | PoPC |

8.3 Electrical Parameters


| | Min. | Typ. | Max. | Unit |
|------------------------------|-------|--------|-------|-------|
| DAC (10K Ohm Loading) | | | | |
| Resolution | - | 16 | - | Bits |
| THD + N (-3dBr) | - | -74.29 | - | dB |
| SNR | - | 93.6 | - | dB |
| Silent SNR | - | 98.2 | - | dB |
| Dynamic range | - | 93.8 | - | dB |
| Frequency response 48KHz | 20 | - | 20K | Hz |
| Frequency response 44.1KHz | 20 | - | 20K | Hz |
| Output voltage (rms) | - | 1.25 | - | Vrms |
| Output voltage swing | 0.5 | - | 4.0 | V |
| DAC (32 Ohm loading) | | | | |
| Resolution | - | 16 | - | Bits |
| THD + N (-3dBr) | - | -71.1 | - | dB |
| SNR | - | 93.7 | - | dB |
| Silent SNR | - | 98.2 | - | dB |
| Dynamic range | - | 93.8 | - | dB |
| Frequency response 48KHz | 20 | - | 20K | Hz |
| Frequency response 44.1KHz | 20 | - | 20K | Hz |
| Output voltage (rms) | - | 1.25 | - | Vrms |
| Output voltage swing | 0.5 | - | 4.0 | V |
| ADC | | | | |
| Resolution | - | 16 | - | bit |
| THD + N (-3dBr) | - | -76.1 | - | dB |
| SNR | - | 83.1 | - | dB |
| Dynamic range | - | 81.6 | - | dB |
| Frequency response 48KHz | 20 | - | 19.2K | Hz |
| Frequency response 44.1KHz | 20 | - | 17.6K | Hz |
| Input range | 0 | - | 2.88 | Vpp |
| Amplification | | | | |
| Volume control level | -45 | - | 0 | dB |
| Volume control step | - | 38 | - | Steps |
| Microphone Input | | | | |
| Boost gain | - | +22.5 | - | dB |
| Gain adjustment range | 0 | - | 22.5 | dB |
| Gain adjustment steps | - | 16 | - | Steps |
| Mixer gain adjustment | -33.0 | - | 12.0 | dB |
| Mixer gain adjustment steps | - | 32 | - | Steps |

9 Audio Quality Graphs

9.1 Line Out Frequency Response @ 48KHz Sample Rate (10K Ohm Loading)

Audio Precision

09/26/08 14:33:51

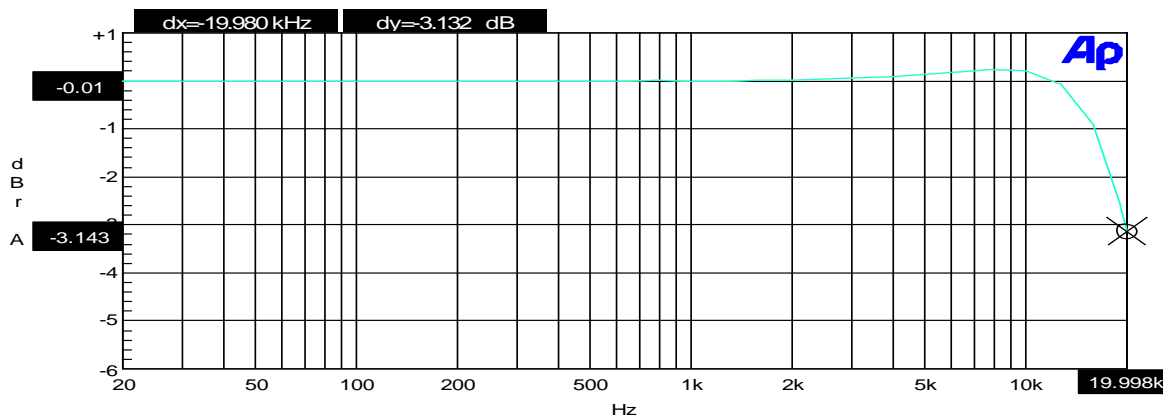


| Sweep | Trace | Color | Line Style | Thick | Data | Axis | Comment |
|-------|-------|--------|------------|-------|------------------------------|------|---------|
| 1 | 1 | Cyan | Solid | 1 | Fasttest.Ch.1 Ampl!Normalize | Left | |
| 1 | 2 | Yellow | Solid | 1 | Fasttest.Ch.2 Ampl!Normalize | Left | |

Vista-Frequency Response-M48k.at27

9.2 Line Out THD+N @ 48KHz sample rate (10K Ohm Loading)

Audio Precision

09/26/08 14:27:07

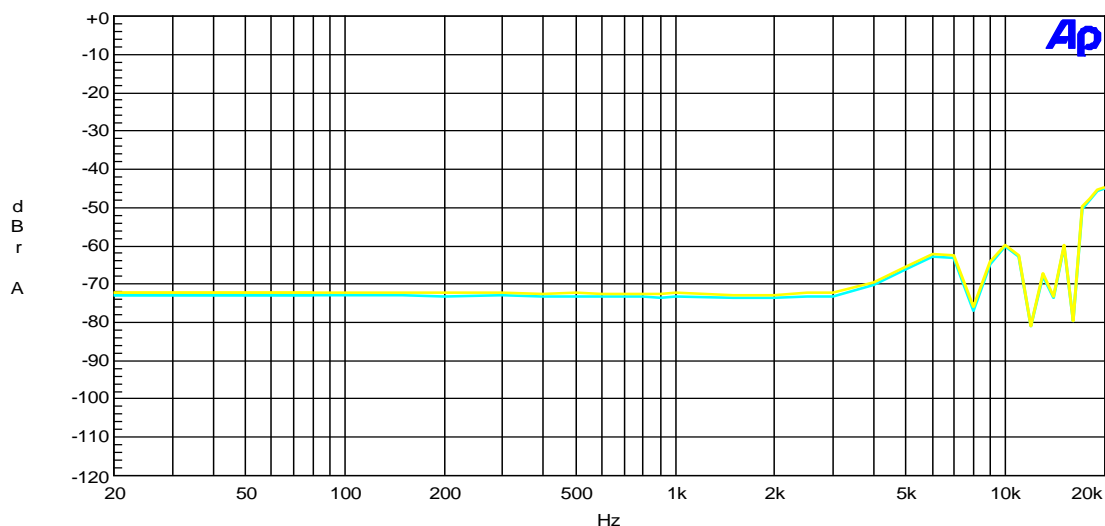


| Sweep | Trace | Color | Line Style | Thick | Data | Axis | Comment |
|-------|-------|--------|------------|-------|-----------------|------|---------|
| 1 | 1 | Cyan | Solid | 2 | Anlr.THd+N Ampl | Left | |
| 1 | 2 | Yellow | Solid | 2 | Anlr.THd+N Ampl | Left | |

Vista-D-A THD+N.at27

9.3 Microphone Input Frequency Response @ 48KHz Sample Rate

Audio Precision A-D FREQUENCY RESPONSE 09/26/08 14:52:45

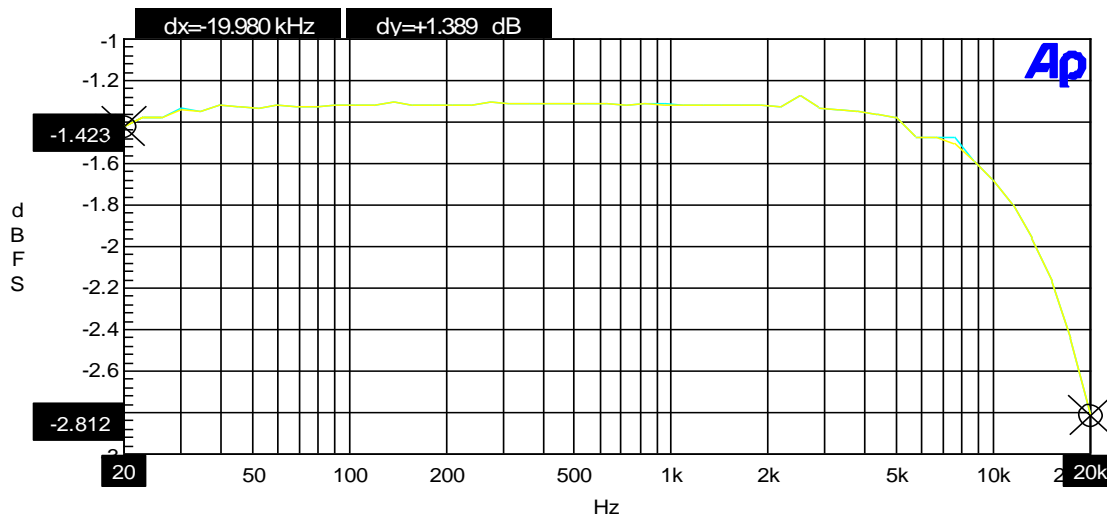


| Sweep | Trace | Color | Line Style | Thick | Data | Axis | Comment | Cursor1 |
|-------|-------|--------|------------|-------|------------------|------|---------|--------------|
| 1 | 1 | Yellow | Solid | 1 | DSP Anlr.Level A | Left | | *-2.812 dBFS |
| 1 | 2 | Cyan | Solid | 1 | DSP Anlr.Level B | Left | | -2.812 dBFS |

Vista-A-D Frequency Response.at2c

9.4 Microphone Input THD+N @ 48KHz Sample Rate

Audio Precision A-D THD+N vs FREQUENCY 09/26/08 14:51:13

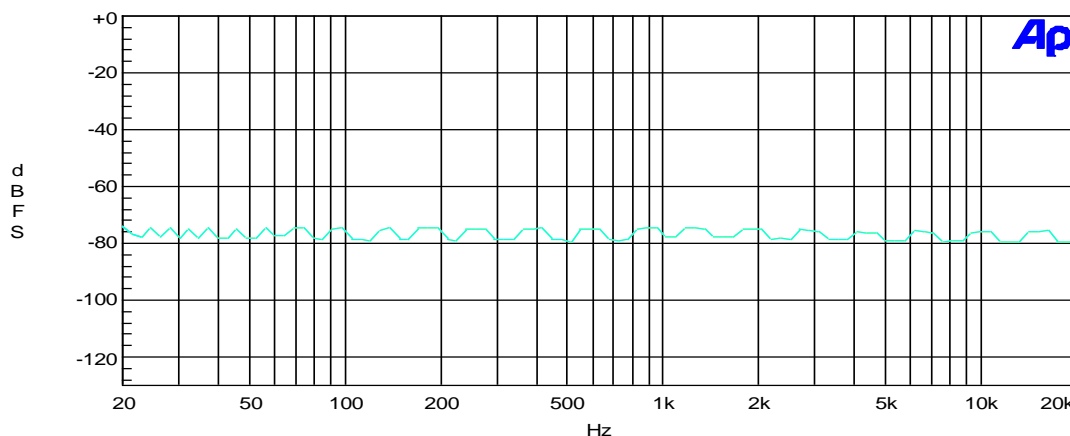

| Sweep | Trace | Color | Line Style | Thick | Data | Axis | Comment |
|-------|-------|--------|------------|-------|-----------------------|------|---------|
| 1 | 1 | Yellow | Solid | 1 | DSP Anlr.THd+N Ampl A | Left | |
| 1 | 2 | Cyan | Solid | 1 | DSP Anlr.THd+N Ampl B | Left | |

Vista-A-D THD+N.at2c

CM108AH

Highly Integrated USB Audio I/O Controller



Reference

- USB specification 1.1 and 2.0-compliant
- USB audio device class specification 1.0-compliant
- USB human interface device class specification 1.11-compliant

CM108AH

Highly Integrated USB Audio I/O Controller



— End of Datasheet —

C-MEDIA ELECTRONICS INC.

6F., 100, Sec. 4, Civil Boulevard, Taipei, Taiwan 106 R.O.C.

TEL : 886-2-8773-1100

FAX : 886-2-8773-2211

E-MAIL : sales@cmedia.com.tw

Disclaimer:

Information furnished by C-Media Electronics Inc. is believed to be accurate and reliable. However, no responsibility is assumed by C-Media Electronics Inc. for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of C-Media. Trademark and registered trademark are the property of their respective owners.